



iCKB-01



IP + VISCA PTZ Video Conference Camera Controller

The iCKB-01 is an IP capable Compact Keyboard and Multi-Camera Controller that is equipped with communication ports to support control via RS-232C/RS-422/IP formats. This compact yet powerful controller will control up to 7 cameras while supporting common protocols like VISCA, ONVIF and Pelco. The built-in LCD screen and web server simplifies the use and configuration of the controller. And the visually bright display makes the characters clear and easy to read. This versatile, precision controller makes it simple to achieve perfect control of the video conference camera.

The iCKB-01 camera controller keyboard is the ideal solution for conference venues, keynote speaking engagements, training rooms, courts, healthcare, government, and education where one needs to have complete control of multiple cameras.

Key Features:


- ✓ IP and analog control modes with independent IP addresses in the network mode.
- ✓ Supports Onvif, Pelco-D, Pelco-P and VISCA protocol.
- ✓ Control conferencing cameras with the browser interface control software.
- ✓ Control up to 7 camera shortcut control buttons and operate the cameras quickly for optimal switching between multiple cameras.
- ✓ Ergonomic and easy to use 4D joystick.
- ✓ Joystick can be used to control the camera pan and tilt and lens proportional zoom in/zoom out features. The operator can increase/decrease the speed of the control by a simple twist movement on the joystick controller.
- ✓ Supports standard POE or DC power supply included.

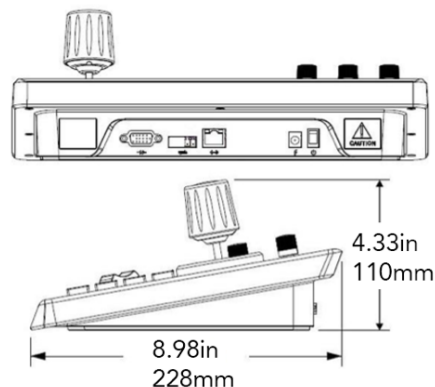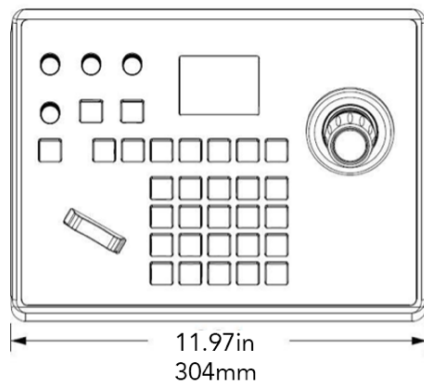

iCKB-01

IP + VISCA PTZ Video Conference Camera Controller

Specifications	
Comm. Interface	RS-232, RS-422 x 1, Ethernet RJ45
System	Linux
Protocol	Full VISCA, PELCO-D/P, ONVIF, NDI (optional)
Output	RS422, RS232, RJ45
Accessories	Seesaw switch, knob, mechanical button, 4D joystick
Beep	On/Off
Screen	TFT LCD 320 x 240
Power Consumption	≤5W
Power	DC12V-2A
Work Temperature	-10°C ~ 55°C / 14°F~131°F
Work Humidity	20%-80% frostless
Storage Temperature	-10°C ~ 60°C / 14°F~140°F
Storage Humidity	0-90% frostless
Packing Size	13.39 x 10.55 x 5.51in (340 x 268 x 140mm)
Outer box size & specifications	21.77 x 18.11 x 13.78in (553 x 460 x 350mm) / 6 sets
Weight	4.33lbs (1965g) / set

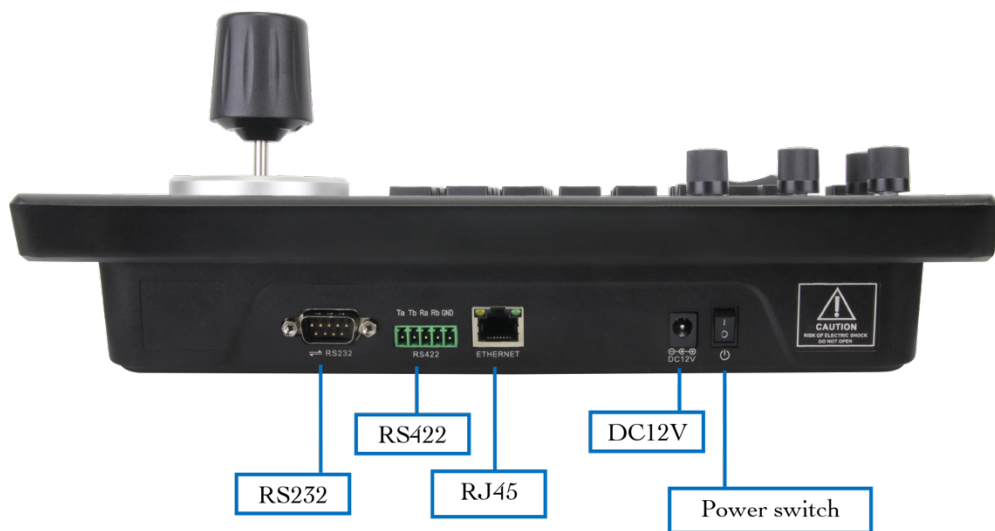

09.18.2023